


**RoHS**  
**Compatible**



發行  
2012.11.29  
達立

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

P.C.B Mounting  
pattern Dimension

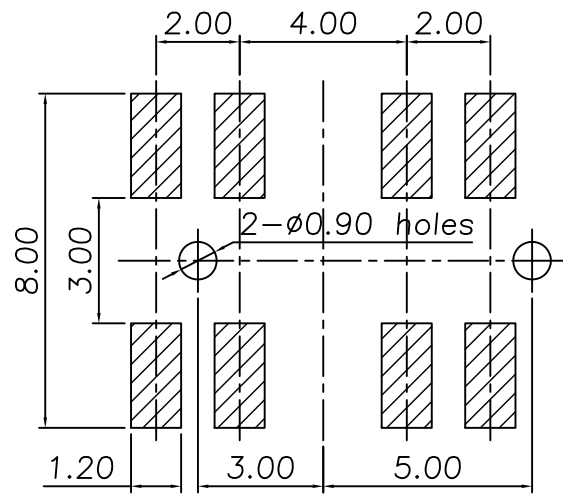



Circuit Diagram

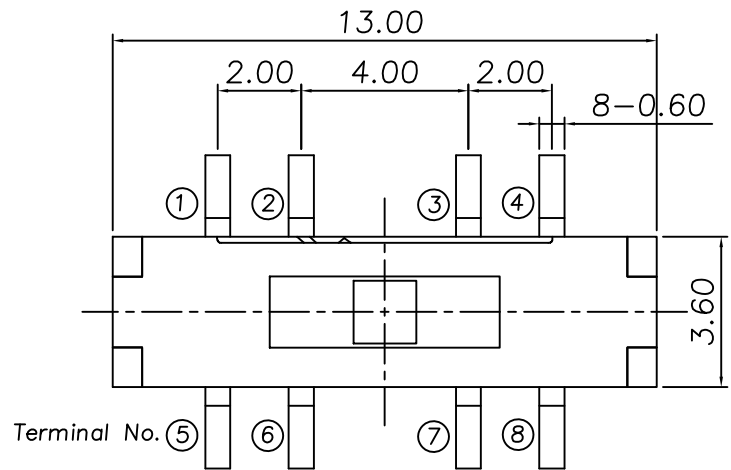

Specification

1. Rating : DC 6V 0.3A
2. Contact resistance : 100mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Operating life : 10,000 cycles Min.
5. Operating force: L → C ← R 250±100gf  
L ← C → R 300±150gf

5	Clip	Phosphor Bronze	1	Ag Clad
4	Cover	Stainless	1	Natural
3	Stem	PA6T	1	White
2	Terminal	Brass	1	Ag Plated
1	Case	PA6T	1	Black
NO	Part Name	Material	Q'ty	Finishing

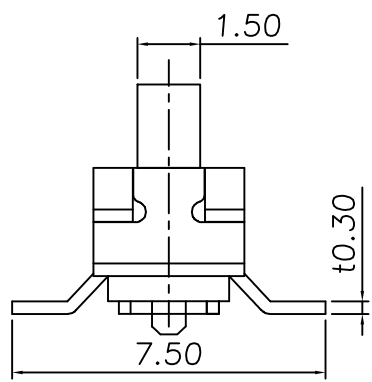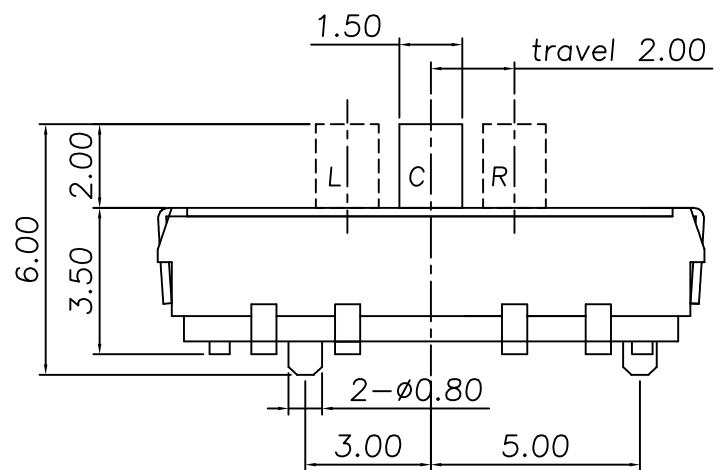

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Benson	SCALE		
DRAWING	Benson	UNIT	mm	
CHECK	Benson	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SILDE SWITCH
less than 10 — ±0.2	PART NO	SS-F36S-S085
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2012/11/29
ANGIE — ±2°		