
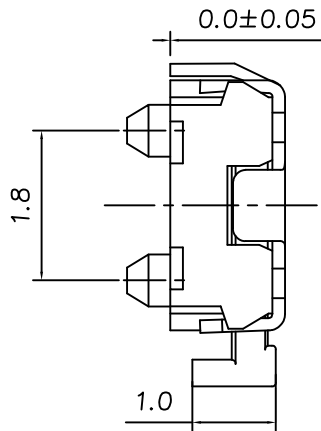
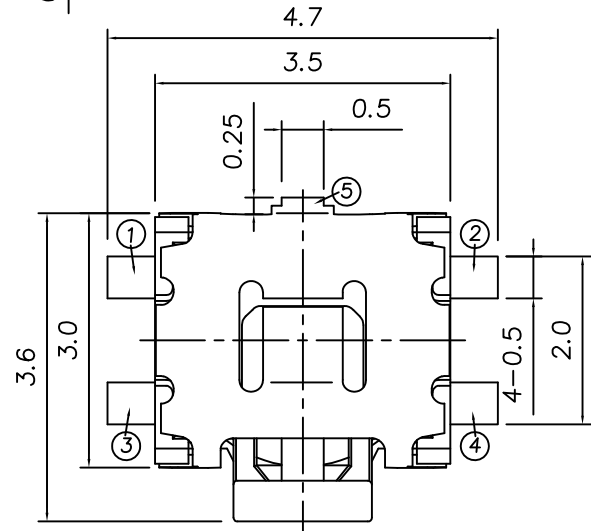




▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

發行
 2013.04.01
 達立


RoHS
 Compatible

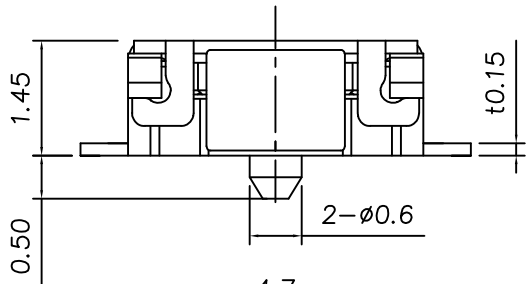

P.C.B Mounting
Pattern Dimension

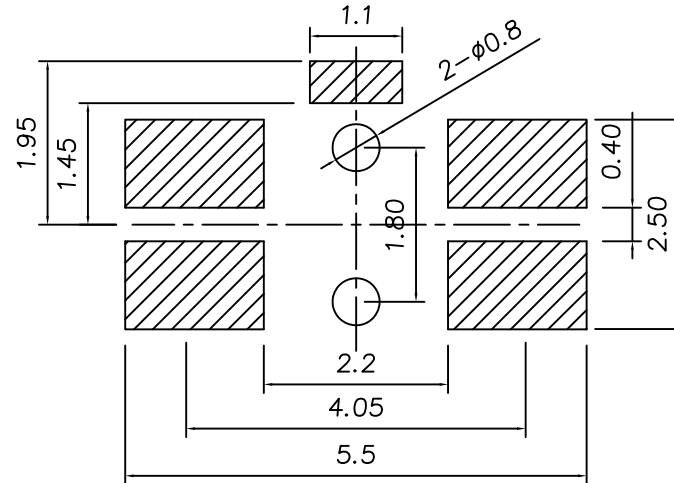

Circuit diagram



Specification

1. Rating : 12V DC 50mA
2. Contact resistance : 100mΩ Max.
3. Insulation resistance : 100MΩ Min.
3. Travel : 0.2±0.1mm
5. Operating force : 2-160±50gf/3-250±50gf.
6. Operating life : 50,000 cycles Min.

6	Terminal	Phosphor Bronze	4	Ag plated
5	Base	PA6T	1	Black
4	Contact	SUS	2	Ag Clad
3	Dust	KTC	1	Yellow
2	Stem	PA6T	1	Black
1	Cover	SUS	1	Natural
NO.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司



Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Frank	SCALE		
DRAWING	Frank	UNIT	mm	
CHECK	Frank	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	
less than 10	±0.2
10~30	±0.3
30~100	±0.5
ANGLE	±2°

PART NAME	TACT SWITCH
PART NO	TS-A15E-BP-x-S085
DRAWING NO	
DATE	2013/04/01

www.dawning2.com.tw