


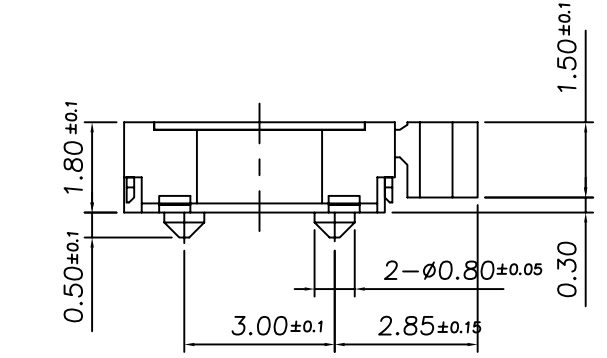
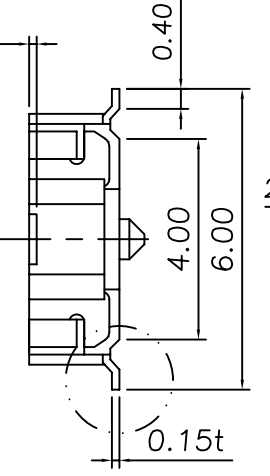


RoHS
Compatible


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

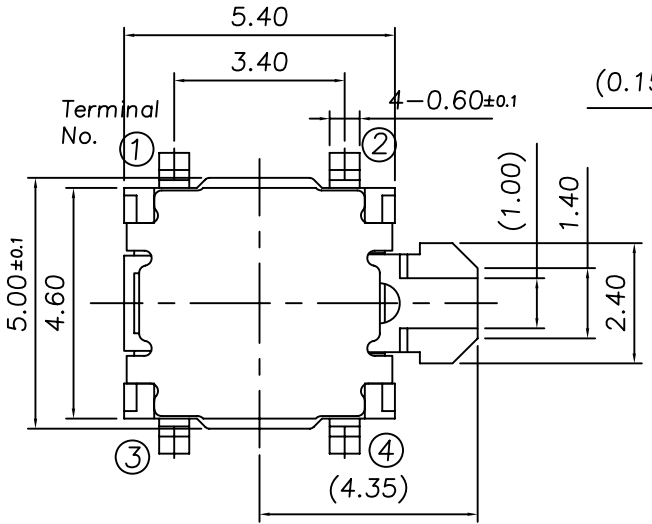

P.C.B Mounting pattern Dimension

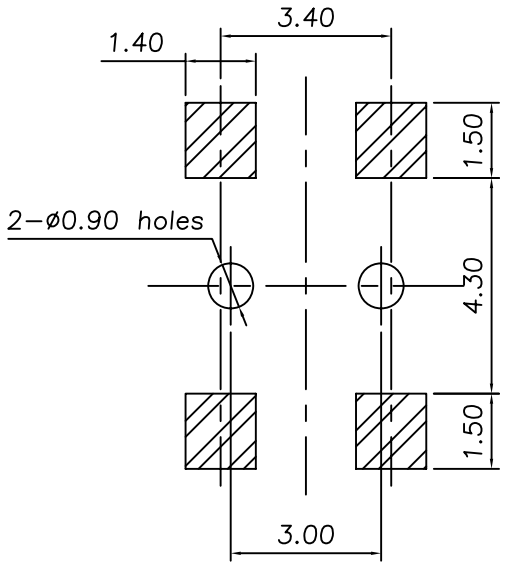

Circuit diagram



發行
2012.12.19
達立

Specification

1. Rating : DC 12V 50mA Max.
2. Contact resistance : 500mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Travel : 0.3±0.15mm
5. Operating life : 50,000 cycles Min.
6. Operating force : 180⁺⁸⁰/₋₄₀ gf.

7	Dust Cover	PI Film	1	Natural
6	Cover	SUS	1	Natural
5	Contact	SUS	1	Ag Clad
4	Push Holder	PA	1	Black
3	Push Button	PA	1	Black
2	Terminal	Phosphor Bronze	4	Ag Plated
1	Base Mold	LCP	1	Black
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
less than 10 — ±0.2	PART NO	TSS11-EF-180-T20-S009
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2012/12/19
ANGIE — ±2°		