







RoHS
Compatible

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

Circuit Diagram



P.C.B Mounting pattern Dimension

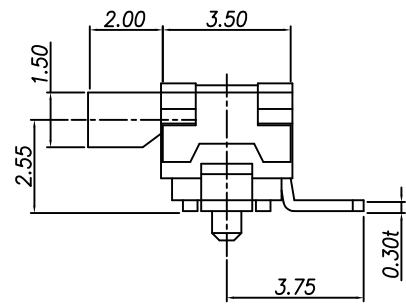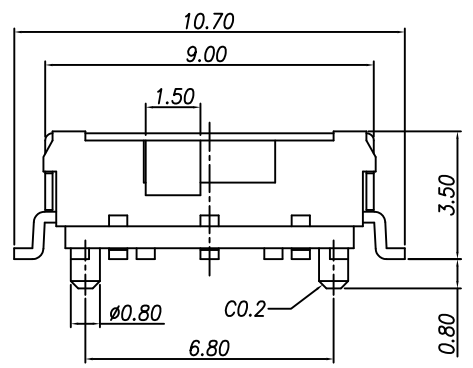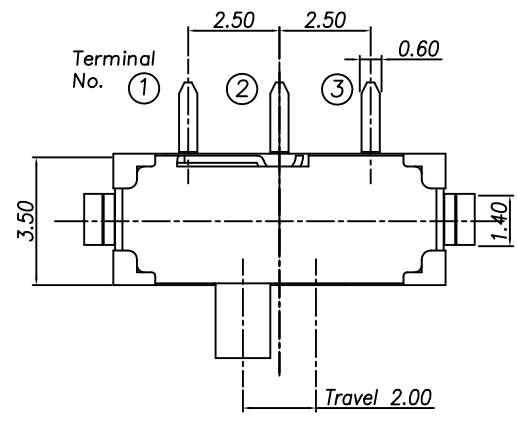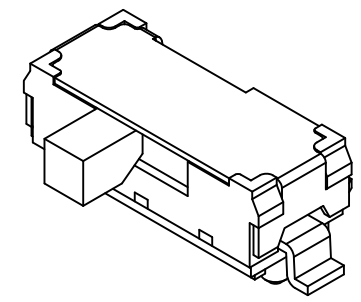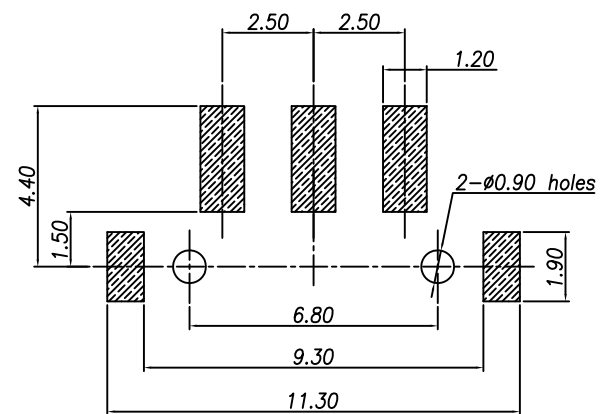

Specifications

1. Rating : DC 6V, 0.3A Max.
2. Contact Resistance : 70mΩ Max.
3. Timing : non-shorting
4. Travel : 2.0±0.1 mm
5. Operating force : 200±100gf
6. Operating Life : 10,000 cycles Min.

發行
2011.11.28
達立

5	Contact Plate	Phosphor Bronze	1	Ag Clad
4	Stem	PA6T	1	Black
3	Cover	Stainless Steel	1	Black
2	Terminal	Brass	3	Ag Plated
1	Case	LCP	1	Black
NO	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
less than 10 — ±0.2	PART NO	SSS15T1-EG-200-T10
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2011/10/12
ANGIE — ±2°		