


RoHS
Compatible



發行
2011.10.04
達立

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

Circuit Diagram



P.C.B Mounting pattern Dimension

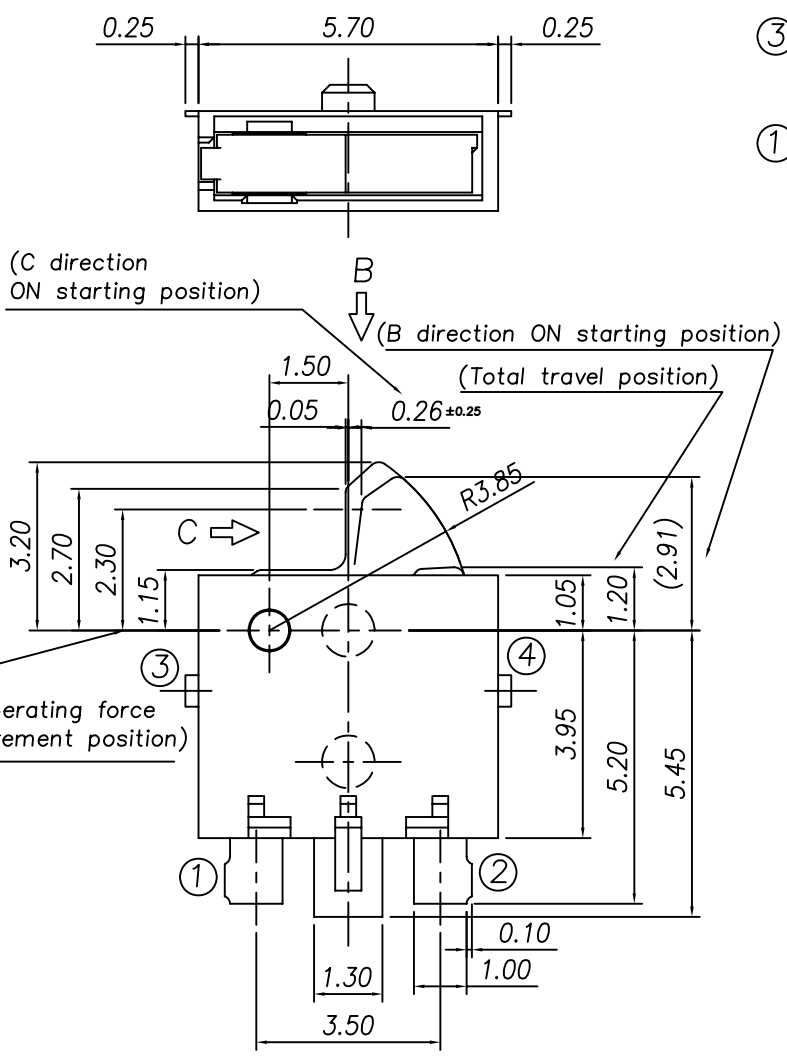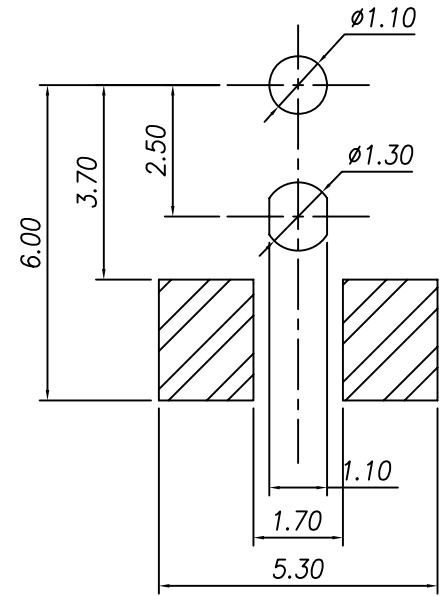

Specifications

1. Rating : DC 3V 50 μ A ~ DC 5V 10mA(resistive load)
2. Contact resistance : 1 Ω Max.
3. Insulation resistance : 100M Ω Min,100V DC
4. Withstanding voltage : 100V AC for 1min
5. Operating force : 160 \pm 50gf
6. Operating life : 50,000 cycles
7. Operating temperature range -20 to 70°

4	Terminal	Copper Alloy	1	Ag Plated
3	Spring	Copper Alloy	1	Ag Plated
2	Stem	PA	1	Black
1	Case	LCP	1	Natural
NO	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	DETECTOR SWITCH
less than 10 \pm 0.2	PART NO	DS-A60-S009
10~30 \pm 0.3	DRAWING NO	
30~100 \pm 0.5	DATE	2011/10/04
ANGIE \pm 2°		