






RoHS
Compatible

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

Circuit diagram



P.C.B Mounting pattern Dimension

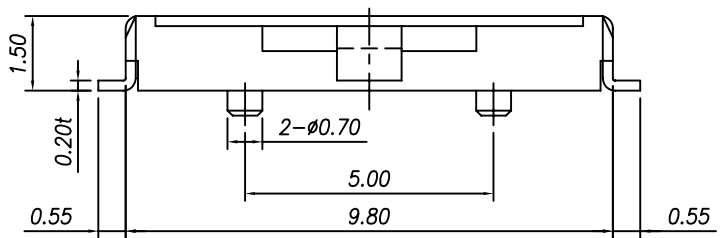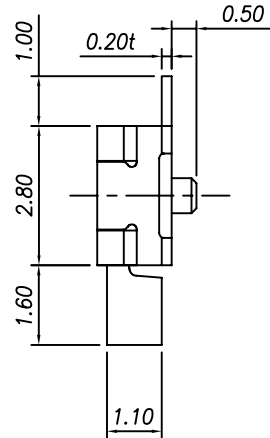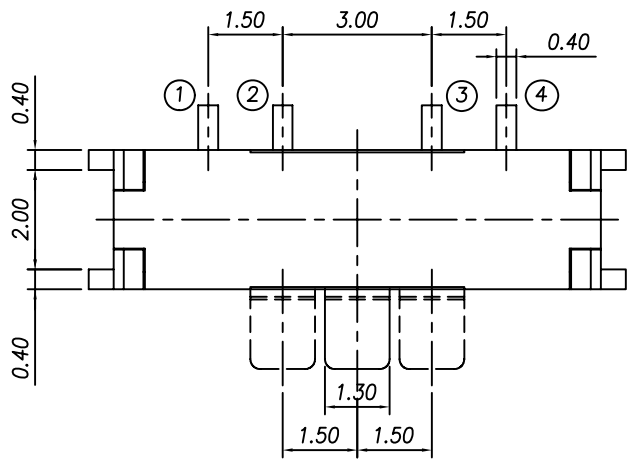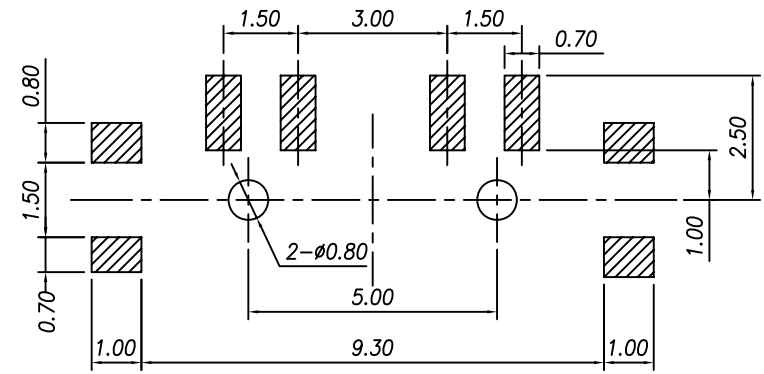

Specification

1. Rating : DC 12V 50mA Max.
2. Contact resistance : 70mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Travel : 1.5mm
5. Operating life : 10,000 cycles Min.
6. Operating force : 200±50gf

發行
2012.06.13
達立

5	Contact	Phosphor Bronze	1	Ag Clad
4	Cover	Copper Alloy	1	Ag Plated
3	Slider	Nylon	1	Black
2	Terminal	Brass	1	Ag Plated
1	Case	LCP	1	Black
NO	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE			TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH	
DRAWING	Will	UNIT	mm		less than 10	±0.2	PART NO	SS-C00AP-B-S092
CHECK	Will	SIZE	A4: 210*297		10~30	±0.3	DRAWING NO	
APPROVAL	Eric	VERSION	01		30~100	±0.5	DATE	2012/06/13
					ANGIE	±2'		