

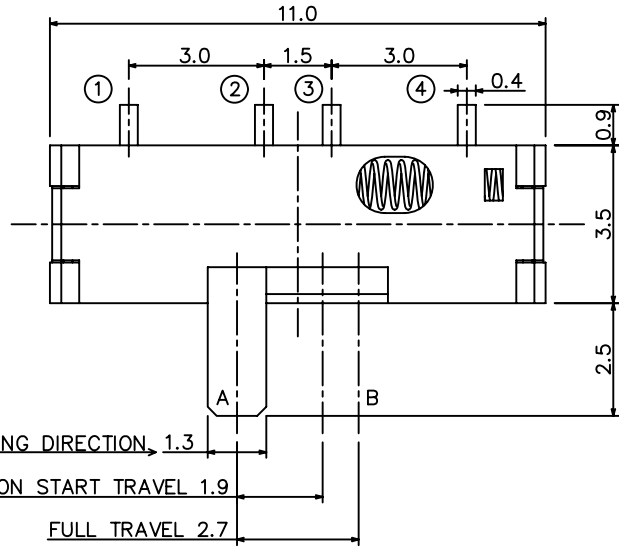


RoHS
Compatible




△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

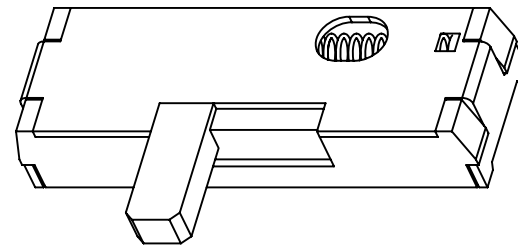

Circuit diagram



P.C.B Mounting pattern Dimension

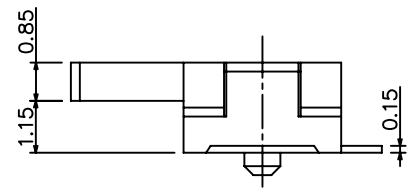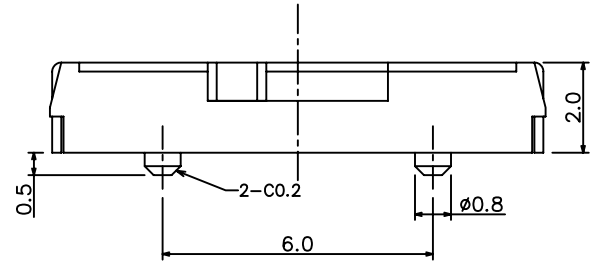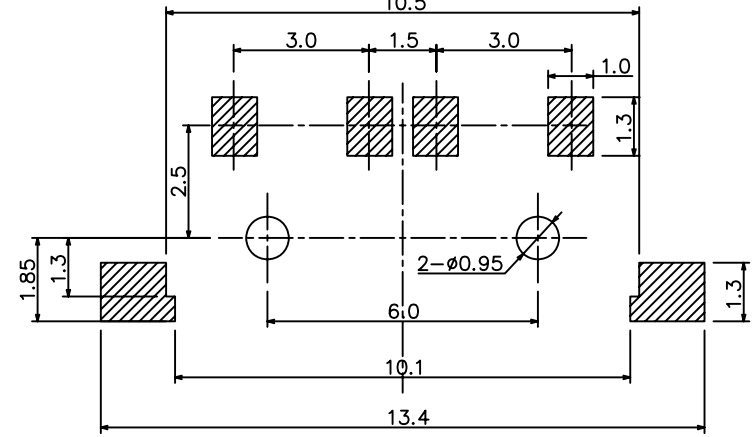

Specifications

1. RATING : DC 24V, 25mA
2. Contact Resistance : 70mΩ Max.
3. Insulation Resistance : DC 100V-100MΩ Minute
4. Operation Force : 180±70gf Max.
5. Operating Life : 10,000 cycles

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
less than 10 — ±0.2	PART NO	SSS12L-E-180-T20
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2010/02/02
ANGIE — ±2°		