

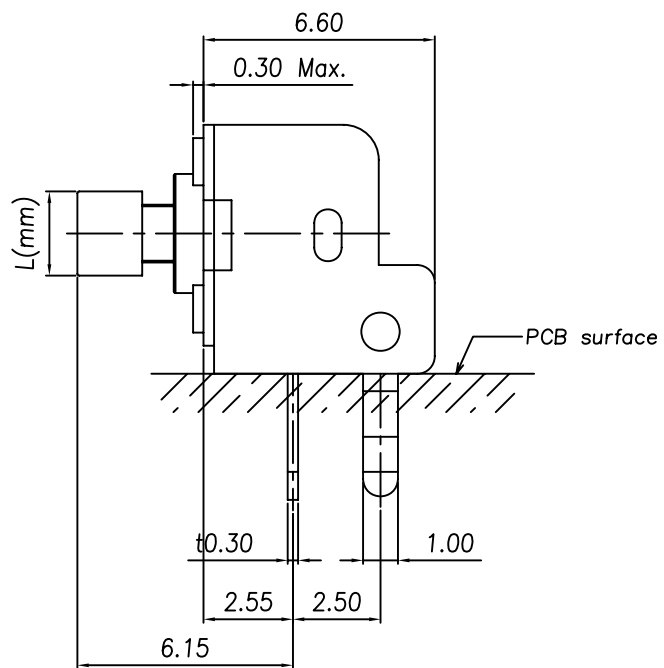



RoHS
Compatible

發行
2012.02.04
達立

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

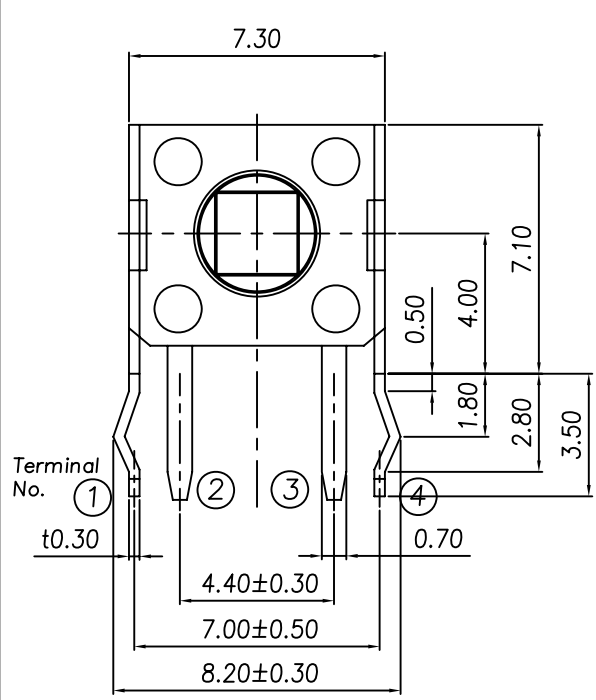

Order Information:
TS-A02VT--S090




Stem Size	
Model#	L(mm)
TS-A02VT	□2.4
TS-A02VTA	□2.8

Specification


- Rating : DC 12V. 50mA Max.
- Travel : 0.25±0.1mm
- Contact resistance : 100mΩ Max.
-

Model	Operating Force	Life Cycles
TS-A02VT	100±30gf	100,000 cycle
TS-A02VT-1	130±50gf	100,000 cycle
TS-A02VT-2	160±50gf	100,000 cycle
TS-A02VT-3	250±50gf	100,000 cycle

Circuit diagram



P.C.B Mounting pattern Dimension

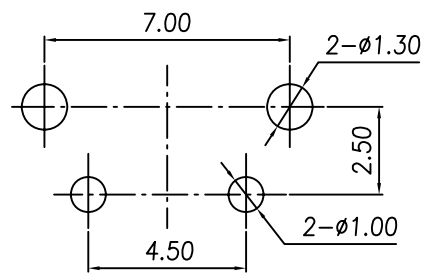

Item	Description	Q'ty	Materials	Treatment
5	Base	1	Nylon 66	Black
4	Terminal	2	Brass	Ag Clad
3	Contactur	1	Phosphor Bronze	Ag Clad
2	Cover	1	SPCC	Ni Plating
1	Stem	1	Nylon 66	Black

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Benson	SCALE		
DRAWING	Benson	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
less than 10 — ±0.2	PART NO	TS-A02VT SERIES
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2012/02/03
ANGIE — ±2°		