

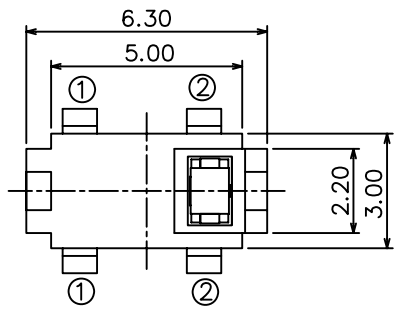
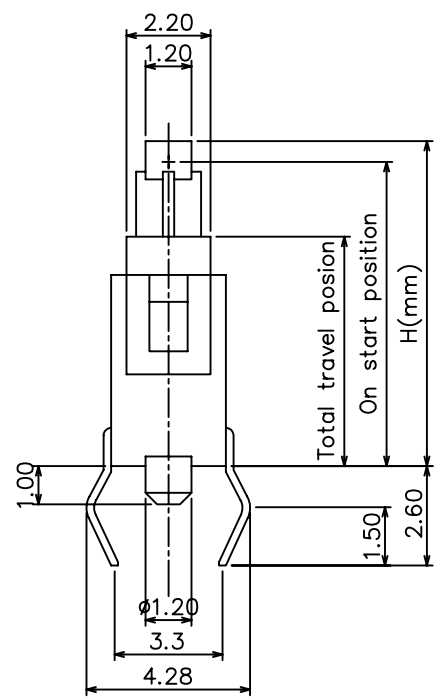
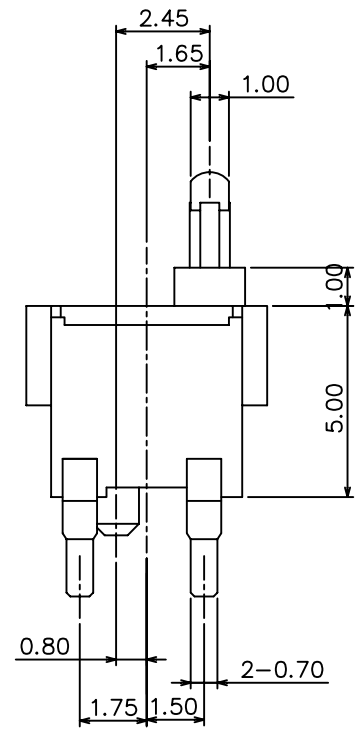


RoHS
Compatible


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

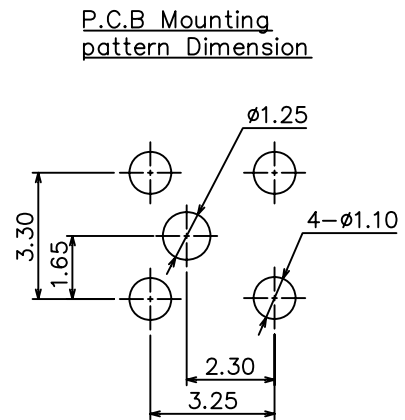

□	H(mm)	Total travel	On start
—	8.5	6.0	7.7
L	9.9	7.4	9.1



- Specifications**
1. Rating : 0.1A 30V DC
 2. Contact resistance : 1Ω Max.
 3. Operating force : 40gf Max.
 4. Operating life : 50,000 cycles

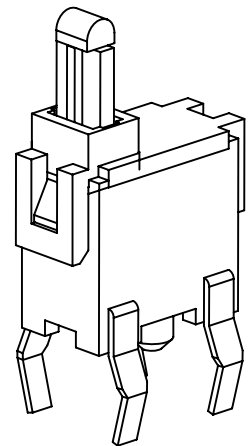

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	DETECTOR SWITCH
less than 10 — ±0.2	PART NO	DS-A20 SERIES
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2010/02/02
ANGIE — ±2°		