


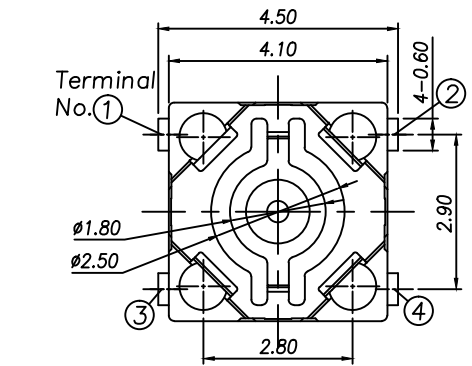



RoHS
Compatible


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

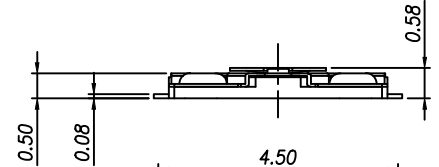



P.C.B Mounting pattern Dimension

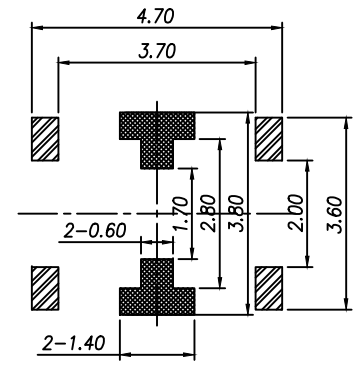

Circuit diagram




Carrier Taping Dimension

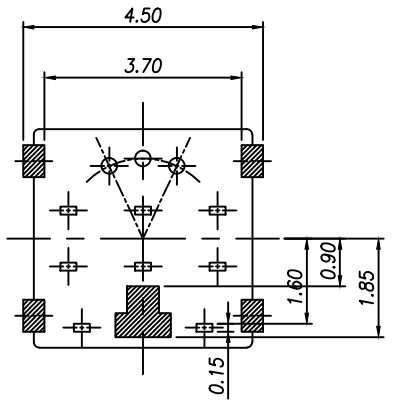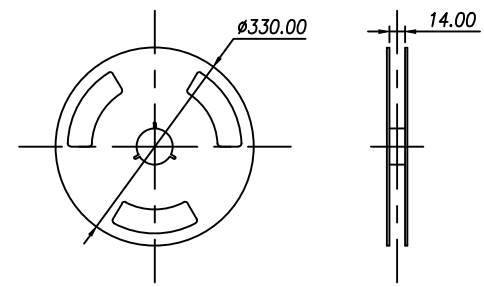

Specification

1. Rating : 50mA, DC12V Max.
2. Contact resistance : 100mΩ Max.
3. Travel : 0.2±0.1mm
4. Operating force : 300±50gf
5. Operating life : 100,000 cycles Min.

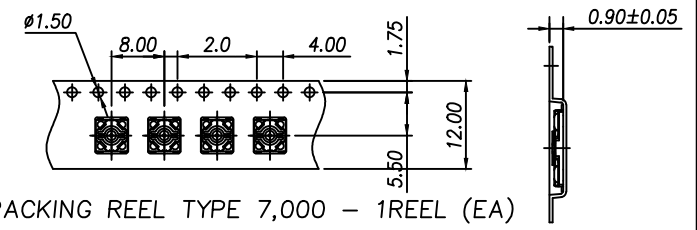

PACKING REEL TYPE 7,000 - 1REEL (EA)

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Benson	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
less than 10 ±0.3	PART NO	TSAA01-158-4-S055
10~30 ±0.4	DRAWING NO	
30~100 ±0.5	DATE	2012/07/20
ANGLE ±2°		

www.dawning2.com.tw