

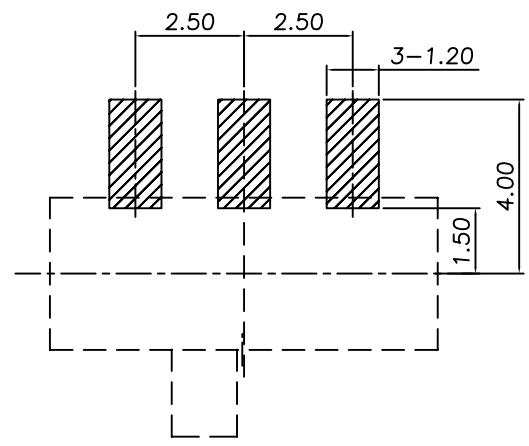


**RoHS**  
**Compatible**

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

P.C.B Mounting  
pattern Dimension



Circuit Diagram

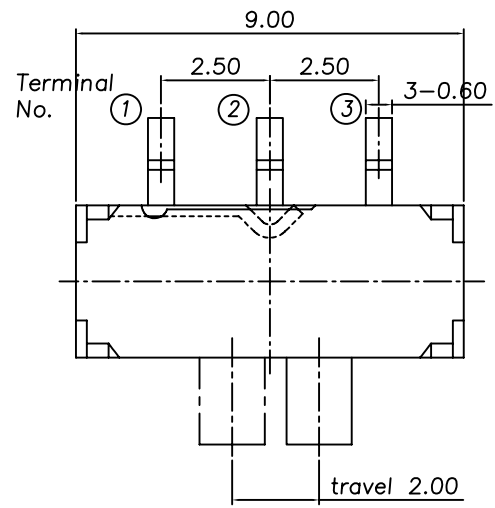

發行  
2013.01.28  
達立

Specifications

1. Rating : DC 4V , 0.3A
2. Circuit : 1C-2P
3. Timing : non-shorting
4. Travel : 2.0±0.1 mm
5. Contact resistance : 70mΩ Max.
6. Operating force : 150±100gf
7. Operating life : 10,000 cycles Min.

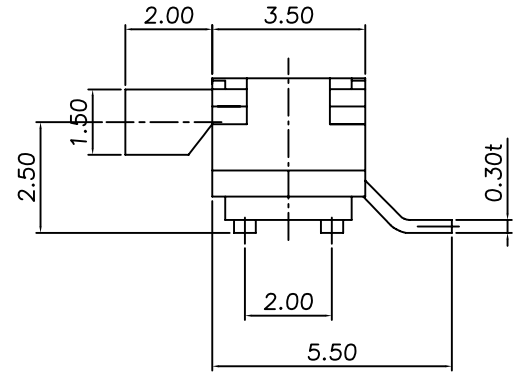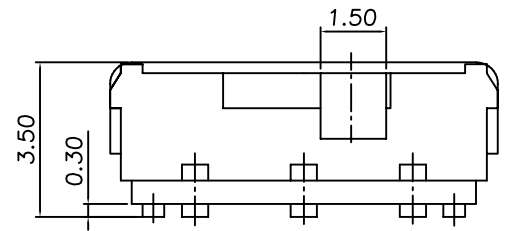

5	Contact Plate	Phosphor Bronze	1	Ag Clad
4	Stem	PA66	1	Black
3	Cover	Stainless Steel	1	-
2	Terminal	Brass	3	Ag Plated
1	Case	PA6T	1	Black
NO	Part Name	Material	Q'ty	Finishing

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Benson	SCALE	
DRAWING	Benson	UNIT	mm
CHECK	Will	SIZE	A4: 210*297
APPROVAL	Eric	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
less than 10 — ±0.3	PART NO	SS-B80-BK-S085
10~30 — ±0.4	DRAWING NO	
30~100 — ±0.5	DATE	2013/01/28
ANGIE — ±2°		

www.dawning2.com.tw