



▲				
▲				
▲				
▲				
ZONE	REV	DESCRIPTION	DATE	APPD.

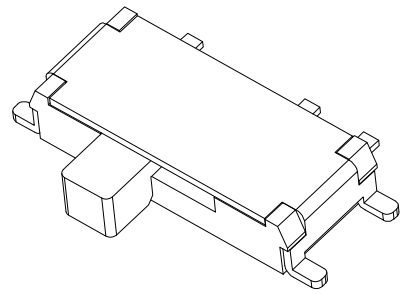





發行
2013.03.12
達立

RoHS
Compatible

P.C.B Mounting
pattern Dimension

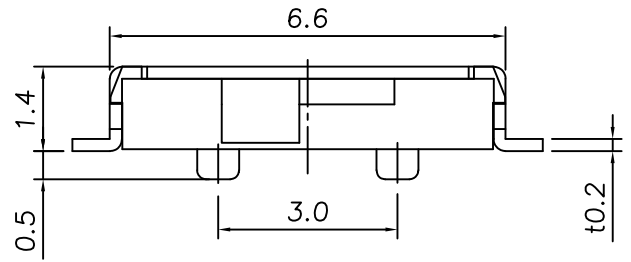

Circuit Diagram

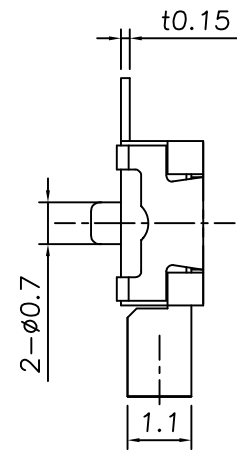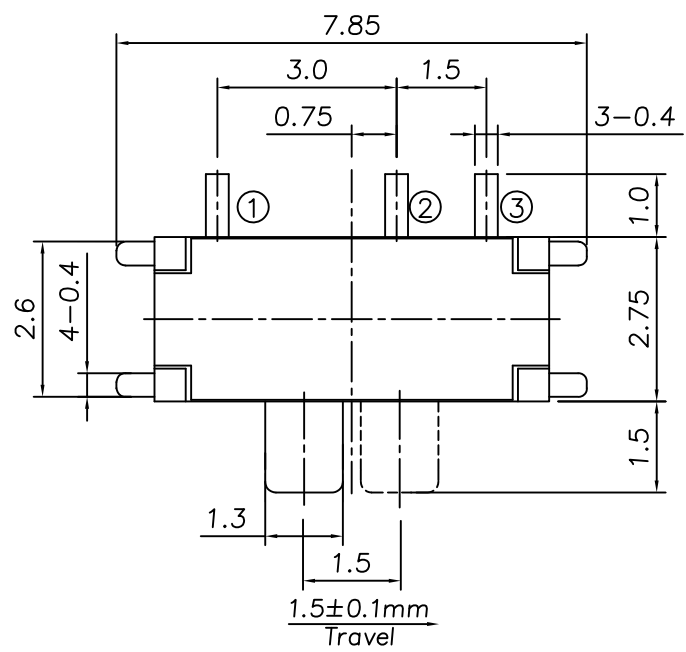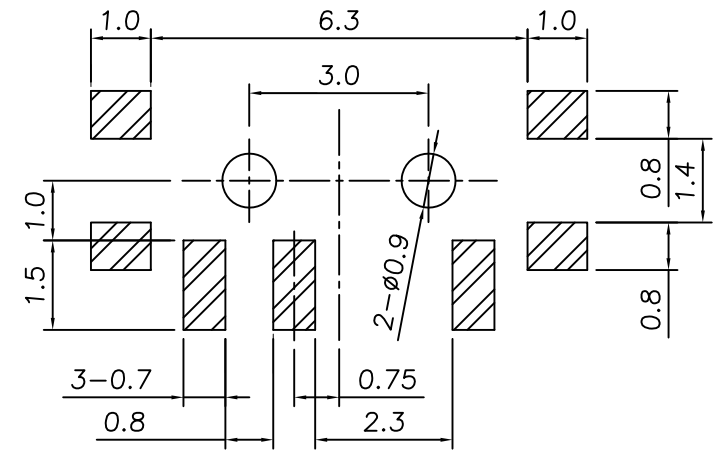

Specifications

1. Rating : 12V DC, 50mA.
2. Contact resistance : 100mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Withstand Voltage : AC 250V for 1 minute.
5. Operating travel : 1.5±0.1mm.
6. Operating force : 160±100gf.
7. Operating life : 10,000 cycles.

6	Terminal	Phosphor Bronze	3	Ag Plated
5	Base	LCP	1	Black
4	Spring	Stainless Steel	1	Natural
3	Clip	Phosphor Bronze	1	Ag Plated
2	Stem	PPA	1	White
1	Case	Brass	1	Ag Plated
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Frank	SCALE		
DRAWING	Frank	UNIT	mm	
CHECK	Frank	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
less than 10 — ±0.2	PART NO	SS-B90AP-W-SP-S085
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2013/03/12
ANGLE — ±2°		