



**RoHS**  
**Compatible**




△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

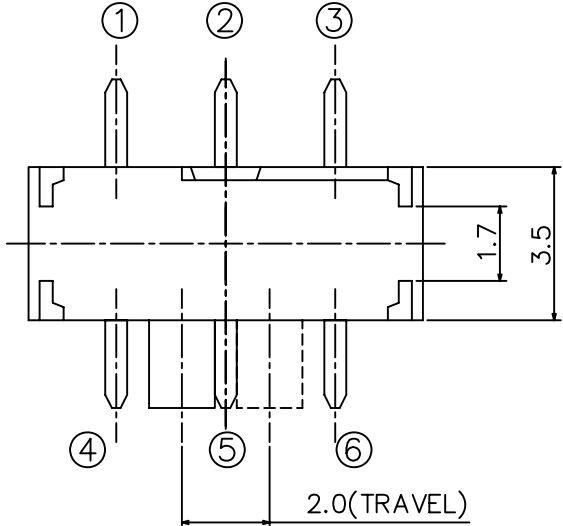

Circuit Diagram



P.C.B Mounting pattern Dimension

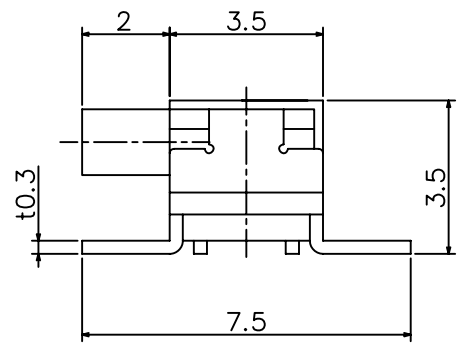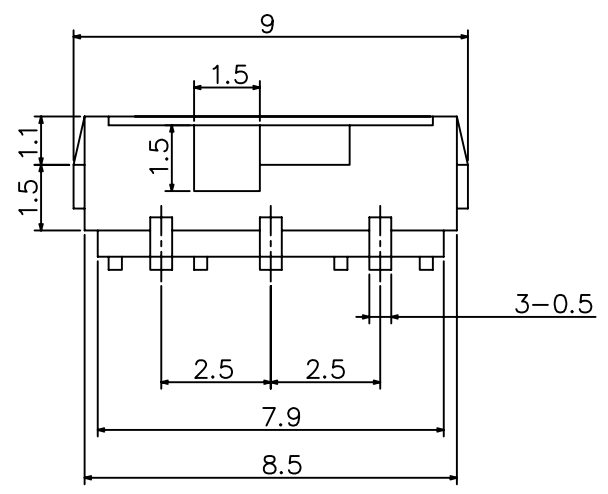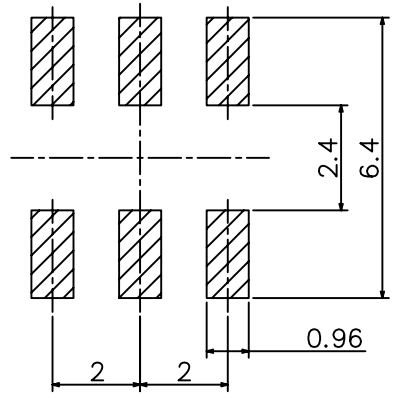

發行  
2009.12.14  
達立

Specifications

1. Rating : DC 6V, 0.3A
2. Circuit : 2C-2P
3. Timing : non-shorting
4. Travel : 2.0±0.1 mm
5. Operating force : 200±100gf
6. Contact Resistance : 70mΩ Max
7. Operating Life : 10,000 cycles

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)
less than 10 — ±0.2
10~30 — ±0.3
30~100 — ±0.5
ANGLE — ±2°

PART NAME	SLIDE SWITCH
PART NO	SS-D45S-S033
DRAWING NO	
DATE	2009/12/14