



**RoHS**  
**Compatible**

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

P.C.B Mounting pattern Dimension

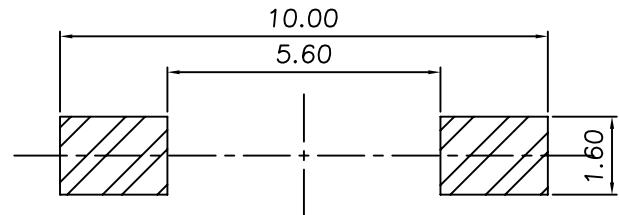

Circuit diagram

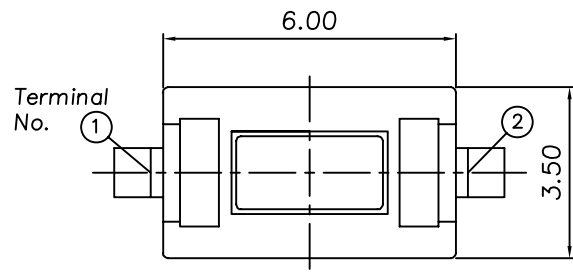

Order Information:  
TS-A01NE---S001

Model#	L(mm)
TS-A01NE	4.3
TS-A01NEA	5.0



Stem Color :  
Blank : Black  
W : White

Force  
Height

Specification

1. Rating : 50mA, DC12V Max.
2. Contact resistance : 100mΩ Max.
3. Travel : 0.25±0.1mm
4. Insulation resistance : DC 100V/1 minute.
5. Withstand voltage : AC 250V/1 minute.
- 6.

Model	Operating Force	Life Cycles
TS-A01NE-2	160±50gf	50,000 cycle
TS-A01NE-3	250±50gf	30,000 cycle

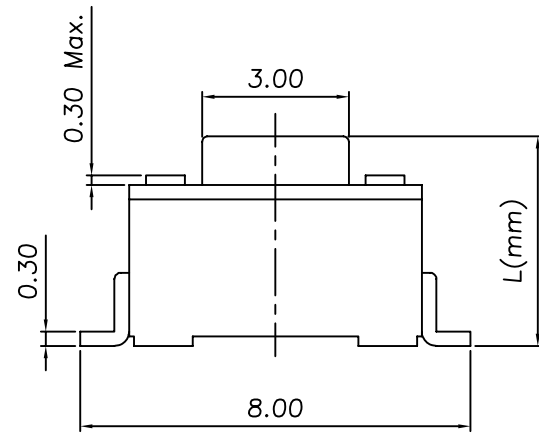

No	Part Name	Material	Q'ty	Finishing
5	Cover	Stainless	1	—————
4	Contact	Stainless	1	Ag Clad
3	Stem	PA6T	1	Black/White
2	Terminal	Brass	2	Ag Plated
1	Case	PA6T	1	Black

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
less than 10 — ±0.3	PART NO	TS-A01NE SERIES
10~30 — ±0.4	DRAWING NO	
30~100 — ±0.5	DATE	2012/09/24
ANGIE — ±2°		