



RoHS
Compatible




△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

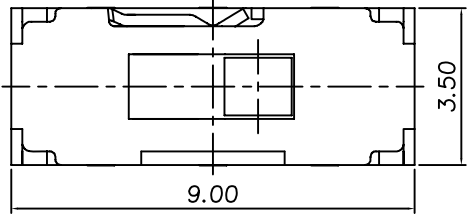

Circuit Diagram



P.C.B Mounting Pattern Dimension

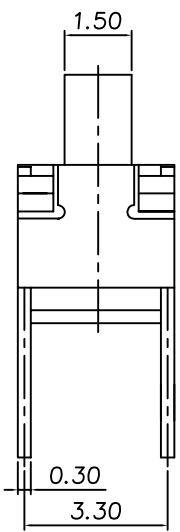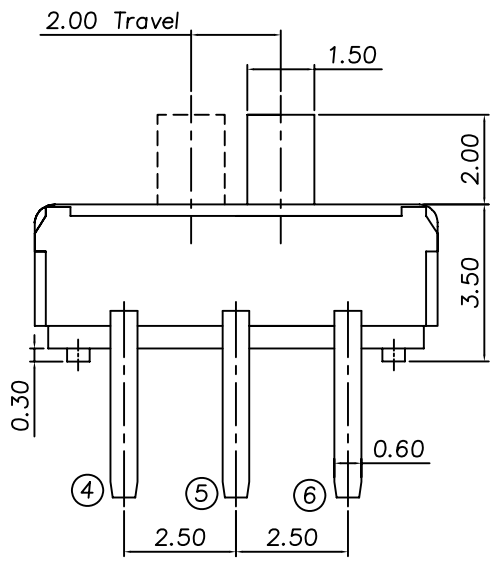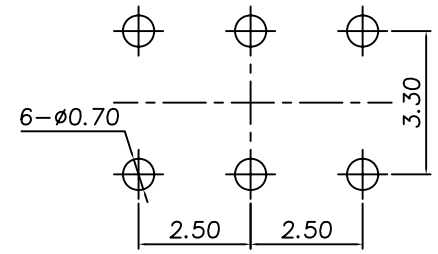

Specifications

1. Rating : DC 6V, 0.3A
2. Contact resistance : 100mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Travel : 2.0±0.3mm
5. Operating force : 200±100gf
6. Operating life : 10,000 cycles Min.

5	Clip	Phosphor Bronze	1	Ag Plated
4	Terminal	Brass	1	Ag Plated
3	Cover	Stainless Steel	1	Natural
2	Knob	PA66	1	Black
1	Case	PA66	1	Black
NO.	PART NAME	MATERIAL	Q"TY	FINISHING

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
less than 10 — ±0.3	PART NO	SS-D35-S085
10~30 — ±0.4	DRAWING NO	
30~100 — ±0.5	DATE	2013/01/14
ANGIE — ±2'		