
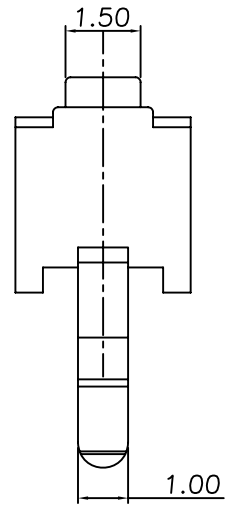
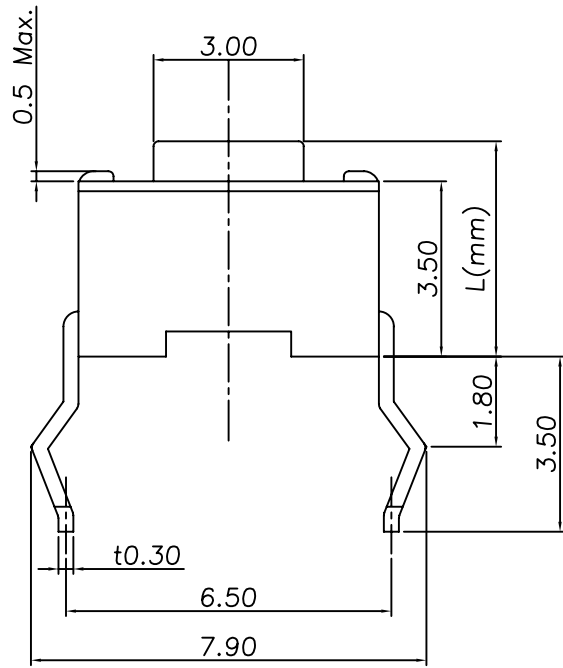

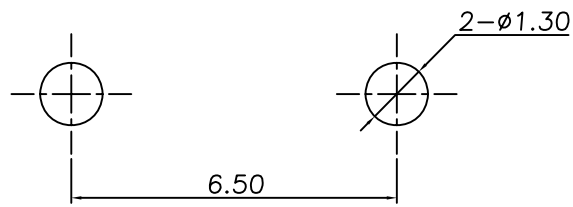


RoHS
Compatible


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

P.C.B Mounting
pattern Dimension

Circuit diagram

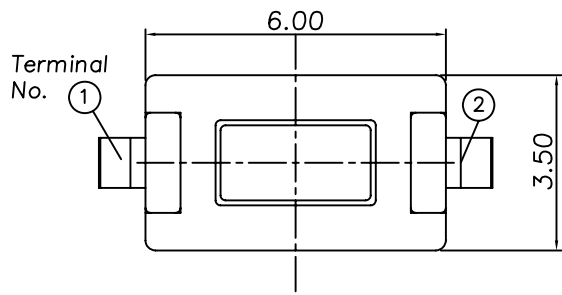

Order Information:
TS-A01--S033



Model#	L(mm)
TS-A01	4.3
TS-A01A	5.0

Specifications

1. Rating : 50mA 12V DC
2. Contact resistance : 100mΩ max.
3. Insulation resistance : 100MΩ min, 100V DC
4. Withstanding voltage : 250V AC- 1minute
5. Travel : 0.25±0.1mm
- 6.

Model	Operating Force	Life Cycles
TS-A01-1	130±50gf	50,000 cycle
TS-A01-2	180±50gf	50,000 cycle
TS-A01-3	250±50gf	30,000 cycle

NO	Part Name	Material	Q"ty	Finishing
5	Cover	Stainless	1	—
4	Contact	Stainless	1	Ag Clad
3	Stem	PA6T	1	Black/White
2	Terminal	Brass	2	Ag Plated
1	Case	PA6T	1	Black

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE	
DRAWING	Will	UNIT	mm
CHECK	Will	SIZE	A4: 210*297
APPROVAL	Eric	VERSION	01

TOLERANCE UNLESS OTHERWISE STATED(mm)
less than 10 — ±0.2
10~30 — ±0.3
30~100 — ±0.5
ANGIE — ±2°

PART NAME	TACT SWITCH
PART NO	TS-A01 SERIES
DRAWING NO	
DATE	2012/10/08