



**RoHS**  
**Compatible**


△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

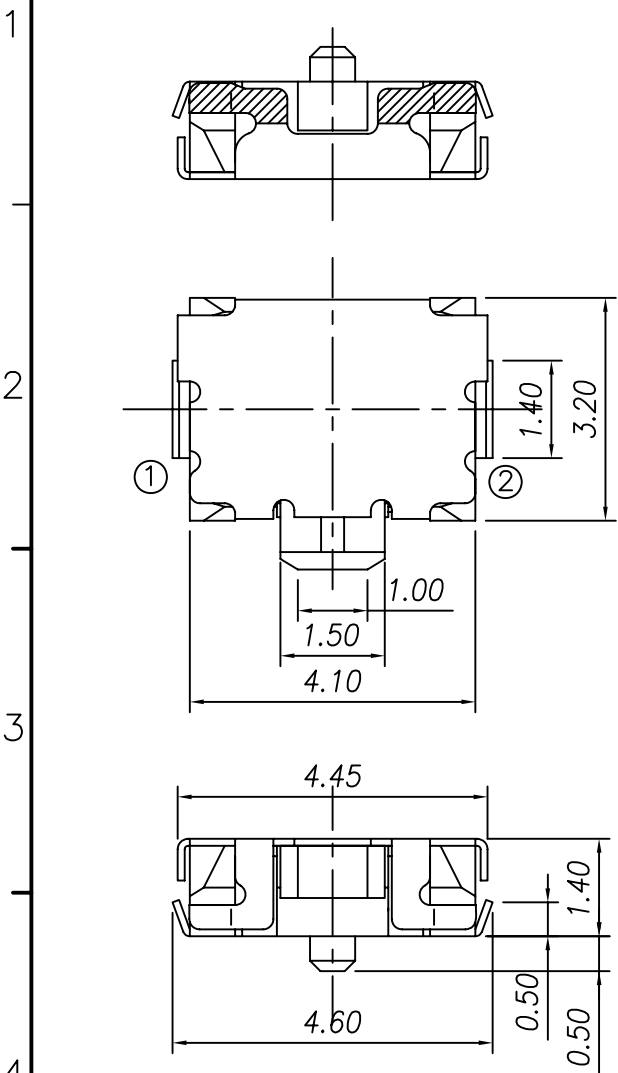

Circuit diagram

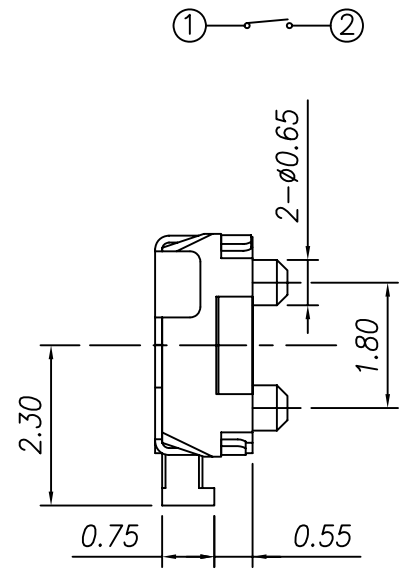

P.C.B Mounting pattern Dimension

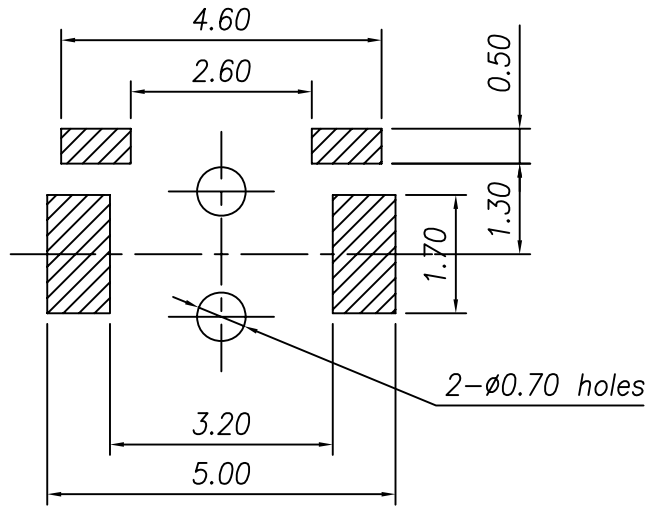

發行  
2011.01.24  
達立

Specification

1. Rating : DC 12V 50mA Max.
2. Contact resistance : 100mΩ Max.
3. Insulation resistance : 100MΩ Min.
4. Travel : 0.2  $\pm_{-0.1}^{+0.2}$  mm
5. Operating life : 100,000 cycles Min.
6. Operating force: 160±70g

7	Cover	Stainless	1	Ag Plated
6	Cam	PA	1	Black
5	Push Button	PA	1	Black
4	Dust Cover	PI	1	
3	Contact Blade	Stainless	1	Ag Plated
2	Terminal	Phosphor Bronze	1	Ag Plated
1	Base Mold	LCP	1	Black
NO	Part Name	Material	Q'ty	Finishing

**達立科技股份有限公司**  
**Dawning Precision Co., Ltd.**  
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
less than 10 — ±0.2	PART NO	TS-A15UE-160-S009
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2011/01/24
ANGIE — ±2°		