


RoHS
Compatible





發行
2011.05.24
達立

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

Circuit Diagram



P.C.B Mounting pattern Dimension

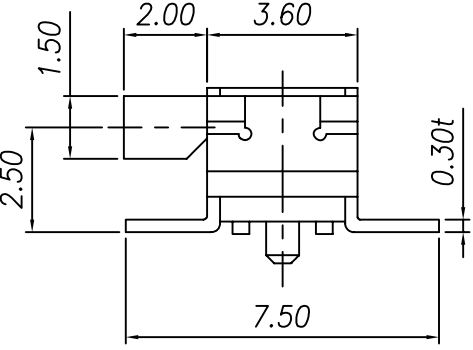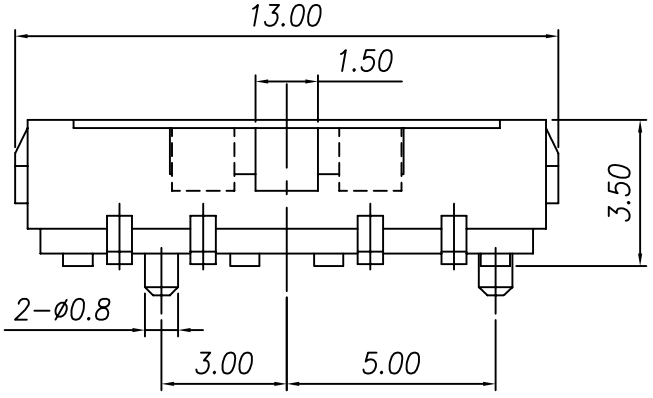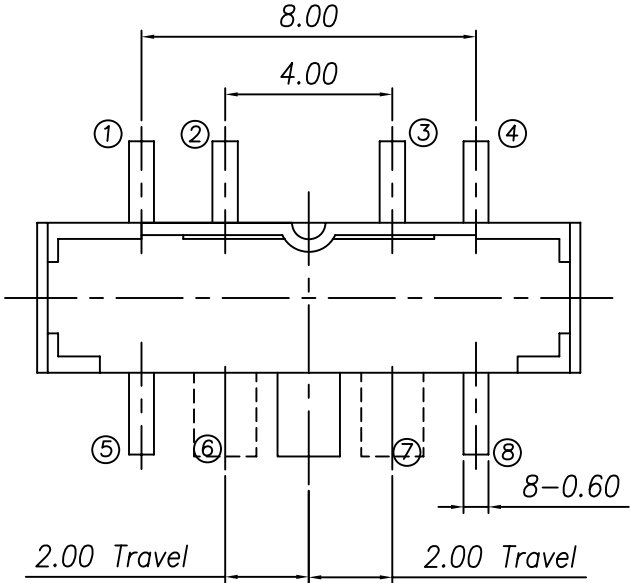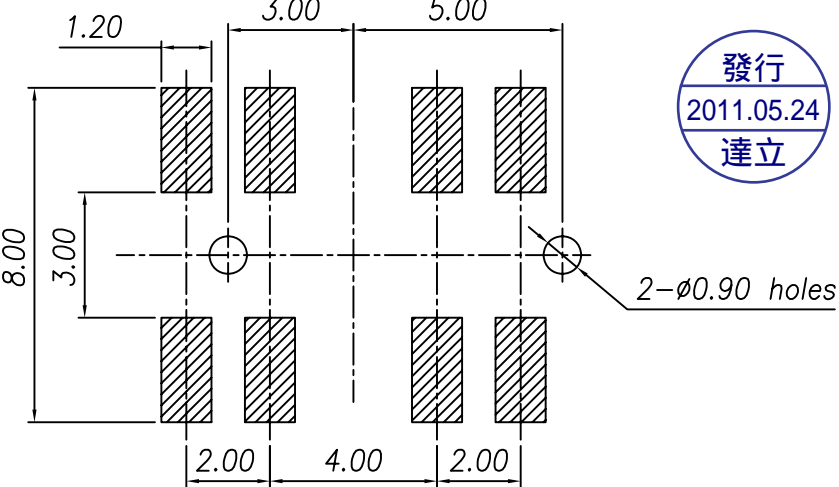

Specifications

1. Rating : DC 6V, 0.3A
2. Circuit : 2C-3P
3. Timing : non-shorting
4. Travel : 2.0 ± 0.1 mm
5. Contact Resistance : $70m\Omega$ Max.
6. Operating Life : 10,000 cycles
7. Operating force :

L→C←R $250 \pm 100gf$
L←C→R $300 \pm 150gf$

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE		
DRAWING	Will	UNIT	mm	
CHECK	Will	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
less than 10 ± 0.2	PART NO	SS-F46S-S033
10~30 ± 0.3	DRAWING NO	
30~100 ± 0.5	DATE	2011/05/24
ANGIE $\pm 2^\circ$		