



△				
△				
△	02	撥柄設變	2011/12/20	Will Chang
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

RoHS
Compatible


達立
2015.01.26
發行

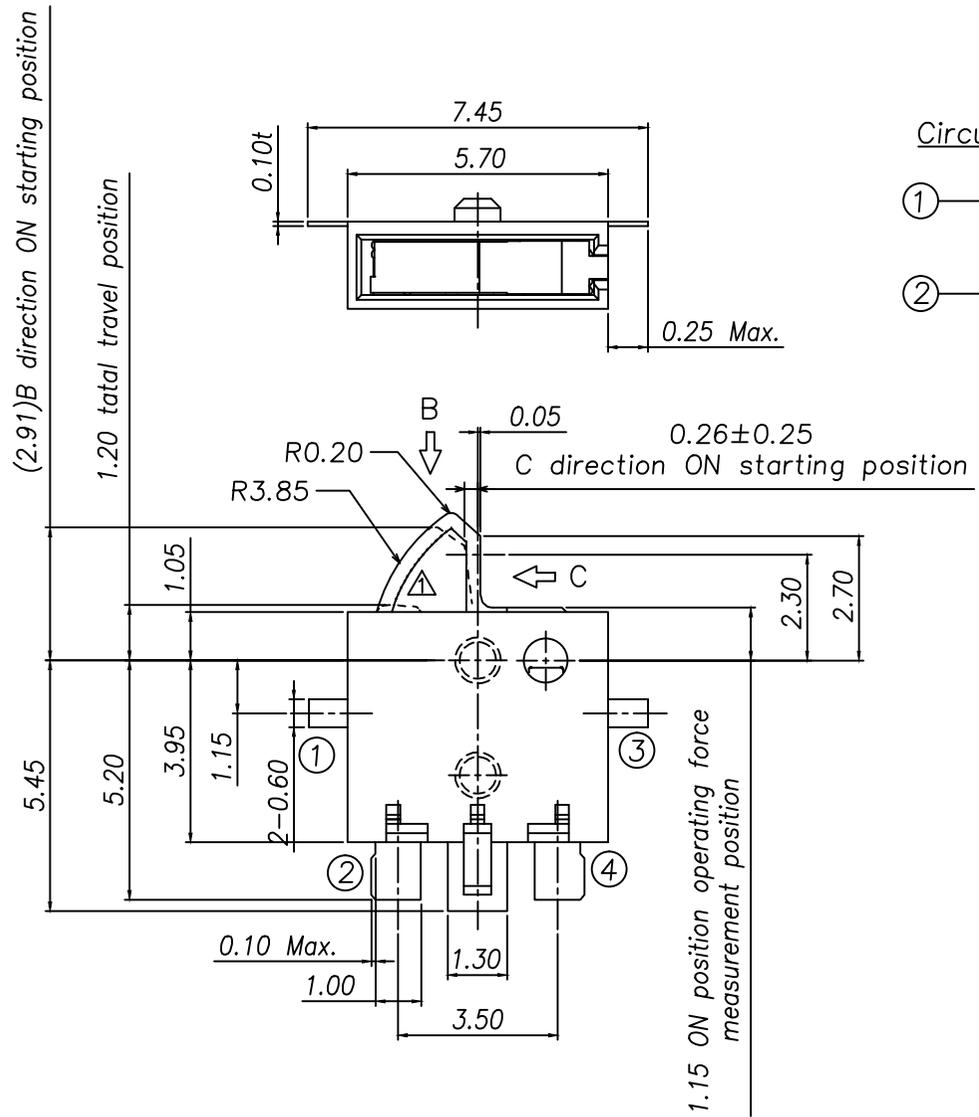

Circuit diagram



P.C.B Mounting pattern Dimension

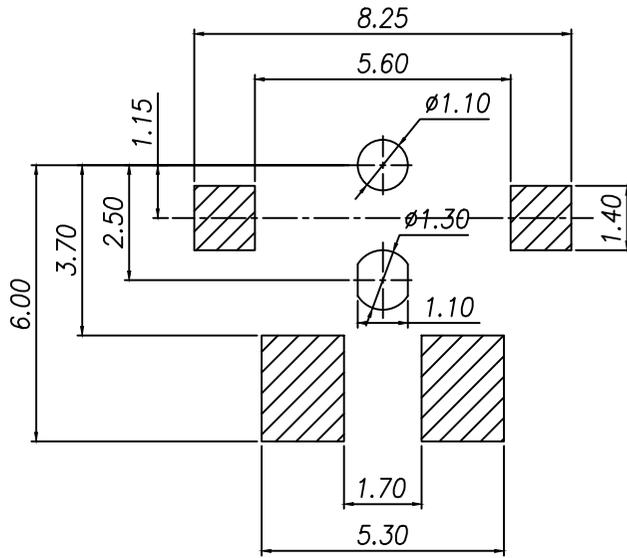

Specifications

1. Rating : DC 3V 50μA~DC 5V 10mA
2. Contact resistance : 1Ω Max.
3. Operating force : 30gf Max.
4. Operating lfe : 50,000 cycles

4	Terminal	Phosphor Bronze	3	Ag Plated
3	Case	LCP	1	
2	Stem	LCP	1	
1	Contact	Phosphor Bronze	1	Ag Clad
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司

Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Will	SCALE	
DRAWING	Ross	UNIT	mm
CHECK	Ross	SIZE	A4: 210*297
APPROVAL	Eric	VERSION	02

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	DETECTOR SWITCH
less than 10 — ±0.3	PART NO	DS-A07L-S017
10~30 — ±0.4	DRAWING NO	
30~100 — ±0.5	DATE	2009/10/12
ANGIE — ±2°		

www.dawning2.com.tw